


# Powerfoil X3.0

## Technical Specifications



Powerfoil X3.0, our biggest, most powerful industrial fan, features a patented system of airfoils and winglets, setting the world standard for airflow. And now it comes standard with BAFCon, a versatile smart controller packed with features, including SmartSense technology and an intuitive user interface.




### IT'S BIG. IT'S BAD. IT MOVES A TON OF AIR.

- **BAFCon** — Smart controller with resistive touchscreen and password protection; controls up to eight fans.
- **Airfoils** — Eight patented Powerfoil airfoils (mill finish) with eight patent-pending AirFences.
- **Winglets** — Powerfoil winglets eliminate wind noise (safety yellow).
- **Motor and Gearbox** — IP43 motor and NitroSeal™ Drive gearbox (STÖBER®); fully sealed drive enclosure resists corrosion and reduces heat buildup for longer life. Optional IP55 harsh environment motor.
- **Onboard VFD** — Housed in an ABS/PVC-based enclosure with built-in heatsink; virtually eliminates RFI and EMI noise.
- **Functional Platform** — Integrate lights, security cameras, speakers, or other devices.
- **Mounting Options** — Standard upper mount installs to I-beams and angle iron; optional kits allow for mounting to solid beams and Z-purlins.
- **Safety Features** — Airfoil retainers, hub clips, safety cables, Grade 8 bolts, fire relay (must be wired during install if required by local code).
- **Colors** — Standard colors are silver and yellow. Want something different? Individualize your fan with one of our 11 classic color upgrades, or work with our design consultants to create a shade that's all your own.



BAFCon



Onboard VFD and NitroSeal Drive Gearbox


### Technical Specifications

Fan	Diameter (A)	Weight <sup>1</sup>	Max Speed	Airfoil Clearances <sup>2</sup>	Input Power and Required Breaker	Motor Horsepower	Sound at Max Speed <sup>3</sup>
PFX3-08	8 ft (2.4 m)	222 lb (101 kg)	197 RPM	2 ft (0.6 m) on sides 4 ft (1.2 m) below ceiling	200–240 VAC, 50/60 Hz, 1 Φ, 20 A 200–240 VAC, 50/60 Hz, 3 Φ, 10 A 400–480 VAC, 50/60 Hz, 3 Φ, 10 A	1.0 hp (0.75 kW)	< 55 dBA
PFX3-10	10 ft (3 m)	231 lb (105 kg)	160 RPM		200–240 VAC, 50/60 Hz, 1 Φ, 30 A 200–240 VAC, 50/60 Hz, 3 Φ, 20 A 400–480 VAC, 50/60 Hz, 3 Φ, 10 A		
PFX3-12	12 ft (3.6 m)	245 lb (111 kg)	139 RPM	2 ft (0.6 m) on sides	200–240 VAC, 50/60 Hz, 1 Φ, 30 A 200–240 VAC, 50/60 Hz, 3 Φ, 20 A 400–480 VAC, 50/60 Hz, 3 Φ, 10 A	1.5 hp (1.1 kW)	
PFX3-14	14 ft (4.3 m)	254 lb (115 kg)	118 RPM	5 ft (1.5 m) below ceiling			
PFX3-16	16 ft (4.9 m)	264 lb (120 kg)	99 RPM	2 ft (0.6 m) on sides	200–240 VAC, 50/60 Hz, 3 Φ, 20 A 400–480 VAC, 50/60 Hz, 3 Φ, 10 A 575–600 VAC, 50/60 Hz, 3 Φ, 10 A	2.0 hp (1.5 kW)	
PFX3-18	18 ft (5.5 m)	281 lb (127 kg)	88 RPM	6 ft (1.8 m) below ceiling			
PFX3-20	20 ft (6.1 m)	290 lb (132 kg)	78 RPM	2 ft (0.6 m) on sides			
PFX3-24	24 ft (7.3 m)	347 lb (157 kg)	65 RPM	7 ft (2.1 m) below ceiling			

<sup>1</sup> Weight does not include mount or extension tube.

<sup>2</sup> Measure the distance from the tip of the winglet to the ceiling or major obstruction.

<sup>3</sup> Fans are sound tested at maximum speed in a laboratory environment. Actual results in field conditions may vary due to sound reflecting surfaces and environmental conditions.

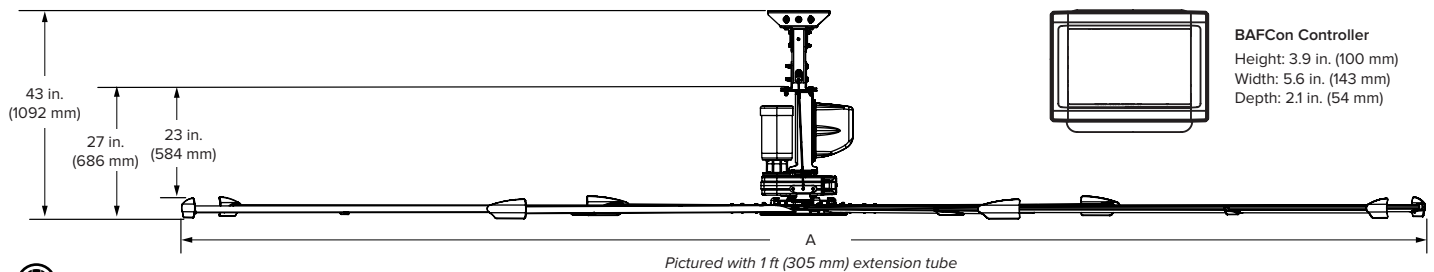

Pictured with 1 ft (305 mm) extension tube



Certified to UL 507 and CSA C22.2 No. 113

Lead times may vary.  
See full warranty for coverage information.  
Specifications subject to change without notice.



USA  
BIGASSFANS.COM  
877-244-3267

CANADA  
BIGASSFANS.COM  
844-924-4277

AUSTRALIA  
BIGASSFANS.COM/AU  
1-300-244-277


SINGAPORE  
BIGASSFANS.COM/SG  
+65 6709 8500

# Powerfoil X3.0 Plus

## Technical Specifications



Powerfoil X3.0 Plus, our biggest, most powerful industrial fan, features a patented system of airfoils and winglets, setting the world standard for airflow. And now it comes with BAFCon, a versatile smart controller packed with features, including SmartSense technology and an intuitive user interface.




### IT'S BIG. IT'S BAD. IT MOVES A TON OF AIR.

- **BAFCon** — Smart controller with intuitive touchscreen interface.
- **Airfoils** — Eight patented Powerfoil airfoils (mill finish) with eight patent-pending AirFences.
- **Winglets** — Powerfoil Plus winglets push air at an angle, moving it over and around obstructions (safety yellow).
- **Motor and Gearbox** — IP43 motor and NitroSeal™ Drive gearbox (STÖBER®); fully sealed drive enclosure resists corrosion and reduces heat buildup for longer life. Optional IP55 harsh environment motor.
- **Onboard VFD** — Housed in an ABS/PVC-based enclosure with built-in heatsink; virtually eliminates RFI and EMI noise.
- **Functional Platform** — Integrate lights, security cameras, speakers, or other devices.
- **Mounting Options** — Standard upper mount installs to I-beams and angle iron; optional kits allow for mounting to solid beams and Z-purlins.
- **Safety Features** — Airfoil retainers, hub clips, safety cables, Grade 8 bolts, fire relay (must be wired during install if required by local code).
- **Colors** — Standard colors are silver and yellow. Want something different? Individualize your fan with one of our 11 classic color upgrades, or work with our design consultants to create a shade that's all your own.



BAFCon



Onboard VFD and NitroSeal Drive Gearbox


### Technical Specifications

Fan	Diameter (A)	Weight <sup>1</sup>	Max Speed	Airfoil Clearances <sup>2</sup>	Motor Horsepower	Input Power and Required Breaker	Sound at Max Speed <sup>3</sup>
PPX3-10	12 ft (3.7 m)	240 lb (109 kg)	140 RPM	2 ft (0.6 m) on sides 5 ft (1.5 m) below ceiling	1.5 hp (1.1 kW)	200–240 VAC, 50/60 Hz, 1 Φ, 30 A 200–240 VAC, 50/60 Hz, 3 Φ, 20 A 400–480 VAC, 50/60 Hz, 3 Φ, 10 A 575–600 VAC, 50/60 Hz, 3 Φ, 10 A	< 55 dBA
PPX3-12	14 ft (4.3 m)	249 lb (113 kg)	118 RPM	2 ft (0.6 m) on sides			
PPX3-14	16 ft (4.9 m)	259 lb (117 kg)	99 RPM	6 ft (1.8 m) below ceiling			
PPX3-16	18 ft (5.5 m)	276 lb (125 kg)	89 RPM	2 ft (0.6 m) on sides	2.0 hp (1.5 kW)		
PPX3-18	20 ft (6.1 m)	285 lb (129 kg)	78 RPM	7 ft (2.1 m) below ceiling			
PPX3-20	22 ft (6.7 m)	334 lb (152 kg)	70 RPM	2 ft (0.6 m) on sides			
PPX3-24	24 ft (7.3 m)	343 lb (156 kg)	62 RPM	8 ft (2.4 m) below ceiling			

<sup>1</sup> Weight does not include mount or extension tube.

<sup>2</sup> Measure the distance from the tip of the winglet to the ceiling or major obstruction.

<sup>3</sup> Fans are sound tested at maximum speed in a laboratory environment. Actual results in field conditions may vary due to sound reflecting surfaces and environmental conditions.

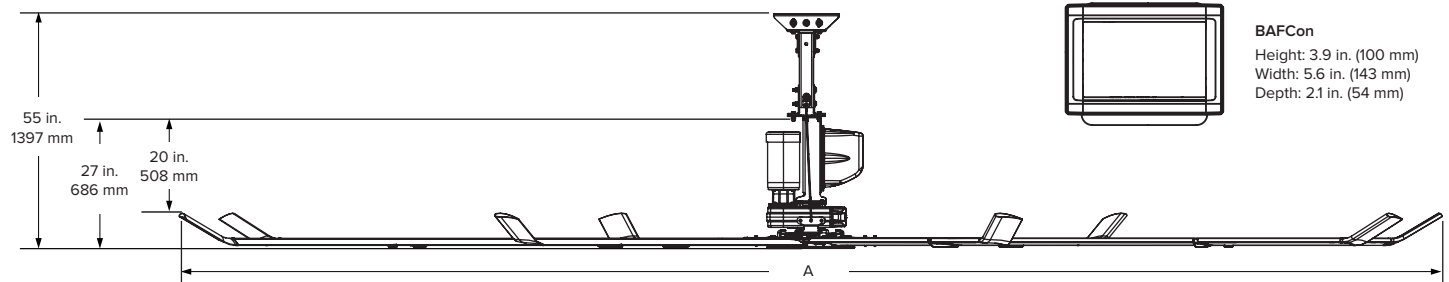

Pictured with 2-ft (609-mm) extension tube



Certified to UL 507 and CSA C22.2

Lead times may vary. See full warranty for coverage information. Specifications subject to change without notice.



USA  
BIGASSFANS.COM  
877-244-3267

CANADA  
BIGASSFANS.COM  
844-924-4277

AUSTRALIA  
BIGASSFANS.COM/AU  
1-300-244-277

SINGAPORE  
BIGASSFANS.COM/SG  
+65 6709 8500