


## Louvered Supply Grilles and Registers • Aluminum

Models:  M300FL • Double Deflection • Long Front Blades • 19mm Blade Spacing

M300FS • Double Deflection • Short Front Blades • 19mm Blade Spacing

Border Type 1 • Surface Mount

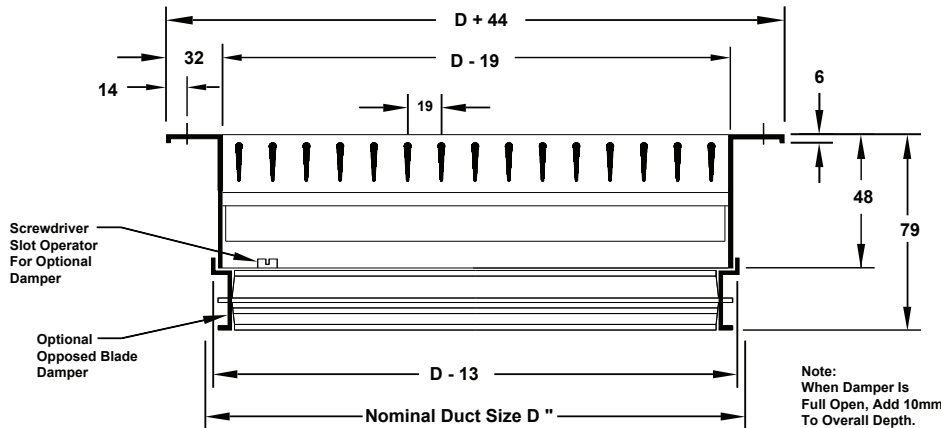

### Available Sizes (Dmm x Dmm)


152mm x 102mm through 1219mm x 1219mm in 51mm increments in one piece construction. Odd sizes are available at additional cost. Sizes larger than 1219mm x 1219mm are shipped in multiple sections with joining strips for field assembly.

**Note:** Wall or duct opening should be duct area ± 3mm. All dimensions are in millimeters.

### Fastenings

Type A • External Screw

Type C • Concealed Screw

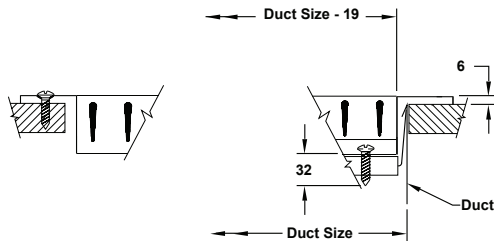


Available with Border Type 1 only. Single deflection blades shown for clarity. For actual blade configuration see above. Type C fastening not available with damper.

### Mounting Frames

PF • Steel Plaster Frame

PFA • Aluminum Plaster Frame

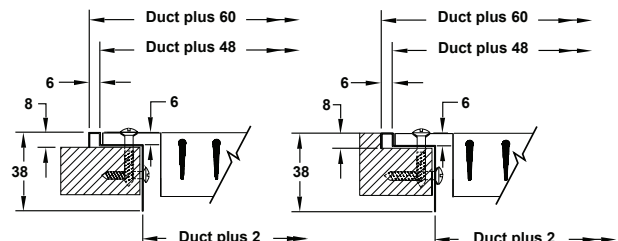

Surface Mounted Example Recessed Mounted Example  
 Note: Wall opening should be listed duct size + 3mm to listed duct size + 6mm. Single deflection blades shown for clarity. For actual blade configuration see above.

### Accessories (Optional)

Check  if provided

- Neck mounted opposed blade damper (galvanized steel)
- IS • Insect Screen (2mm square mesh – galvanized steel)
- DS • Debris Screen (6mm square mesh – galvanized steel)
- EQT • Earthquake tabs
- Other \_\_\_\_\_

### Standard Finish: #26 White

Optional finish \_\_\_\_\_

### General Description

- Available with front louvers vertical or horizontal.
- #8 x 32mm lg. Phillips flat head sheet metal screws painted white.
- Front and rear louvers are individually adjustable.
- Optional opposed blade damper has screwdriver adjustment accessible through face of register.
- Material: Aluminum.
- All dimensions are ± 2mm.